


Eclipse™ P326 and P327 OEM Boards

Experience Unparalleled Accuracy and Reliability with Multi-Frequency, Multi-GNSS RTK and Onboard Atlas® L-Band

key features

- Uses GPS, GLONASS, BeiDou, and Galileo and is QZSS ready
- Long-range RTK baselines up to 50 km with fast acquisition times
- Compatible with many RTK sources including Hemisphere GNSS' ROX format, RTCM, CMR, CMR+
- Mechanically and electrically (pin-for-pin) compatible with many Hemisphere and other manufacturers' modules
- Atlas L-band corrections providing position accuracy down to 2 cm RMS, positioning sustainability with Tracer™ technology, and convergence times as low as 10 minutes
- Athena™ GNSS engine providing best-in-class RTK performance

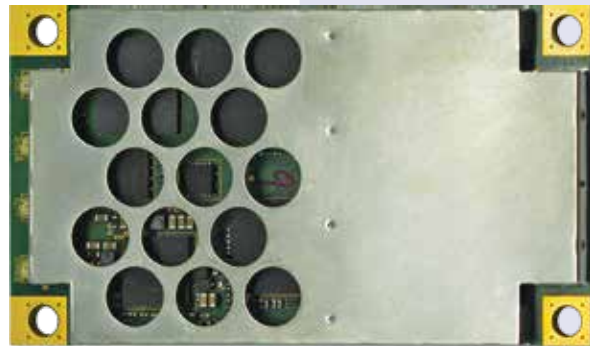

Track More Signals for the Most Robust Low-Power, Multi-Frequency, Multi-GNSS Solution

Track more signals for unparalleled positioning performance with Hemisphere GNSS' new Eclipse P326 and P327 OEM modules. The latest technology platform enables simultaneous tracking of all satellite signals including GPS, GLONASS, BeiDou, Galileo, and L-band (QZSS ready) making it the most robust and reliable solution. The updated power management system efficiently governs the processor, memory, and ASIC making it ideal for multiple integration applications including handheld and battery-powered devices.

Experience Unparalleled Accuracy and Reliability with Advanced Technology Features

The P326 and P327 are the most accurate and reliable OEM modules with two new advanced technology features; aRTK™ and Tracer™. Hemisphere's all-new aRTK technology, powered by Atlas, allows the P326 and P327 to operate with RTK accuracies when RTK corrections fail. Tracer utilizes specialized algorithms to sustain positioning in the absence of corrections data.

Scalable Solutions

With the Eclipse P326 and P327, positioning is scalable and field upgradable with all Hemisphere software and service options. Utilize the same centimeter-level accuracy in either single frequency mode, or employ the full performance and fast RTK initialization times over long distances with multi-frequency, multi-constellation GNSS signals. High-accuracy L-band positioning from meter to sub-decimeter levels available via Atlas correction service.

Ease of Migration

Leverage the compact size and easy integration in your design. The 34-pin P326 module is a drop-in upgrade for many Hemisphere products. P327 is a drop-in upgrade for existing designs using standard 20-pin modules from other manufacturers.



Precision@HGNSS.com
www.HGNSS.com

Eclipse P326 and P327 OEM Boards

GNSS Sensor Specifications

Receiver Type:	GNSS multi-frequency RTK with carrier phase	
Signals Received:	GPS L1CA/L1P/L1C/L2P/L2C/L5 GLONASS G1/G2, P1/P2 BeiDou, B1/B2 (B3 separate variant without L5) GALILEO E1BC/E5a/E5b QZSS L1CA/L2C/L5/L1C	
Channels:	372	
GPS Sensitivity:	-142 dBm	
SBAS Tracking:	3-channel, parallel tracking	
Update Rate:	1 Hz standard, 10 or 20 Hz optional 50Hz with firmware upgrade	
Horizontal Accuracy:		
RMS (67%):	Horizontal	Vertical
RTK: ¹	8 mm + 1 ppm	15 mm + 2 ppm
SBAS (WAAS): ²	0.3 m	0.6 m
Autonomous, no SA: ²	1.2 m	2.4 m
Atlas H10 (L-band):	0.04 m	
Atlas H30 (L-band):	0.15 m	
Atlas H100 (L-band):	0.50 m	
Timing (1PPS) Accuracy:	20 ns	
Cold Start:	< 60 s typical (no almanac or RTC)	
Warm Start:	< 30 s typical (almanac and RTC)	
Hot Start:	< 10 s typical (almanac, RTC and position)	
Maximum Speed:	1,850 kph (999 kts)	
Maximum Altitude:	18,288 m (60,000 ft)	
Differential Options:	SBAS, Autonomous, External RTCM, RTK, L-band (Atlas) DGPS	

L-Band Sensor Specifications

Receiver Type:	Single Channel
Channels:	1525 to 1560 MHz
Sensitivity:	-140 dBm
Channel Spacing:	5.0 kHz
Satellite Selection:	Manual and Automatic
Reacquisition Time:	15 seconds (typical)

Communications

Serial Ports:	4 full-duplex 3.3 V CMOS (3 main serial ports, 1 differential-only port), 1 USB Host, 1 USB Device, 2 CAN
Interface Level:	3.3V CMOS
Baud Rates:	4800 - 115200
Correction I/O Protocol:	Hemisphere GNSS proprietary, ROX Format, RTCM v2.3, RTCM v3.2, CMR, CMR+
Data I/O Protocol:	NMEA 0183, Crescent binary ³
Timing Output:	1PPS, CMOS, active high, rising edge sync, 10 kΩ, 10 pF load
Event Marker Input:	CMOS, active low, falling edge sync, 10 kΩ, 10 pF load

Authorized Distributor:

Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.
Hemisphere GNSS, aRTK, Athena, Atlas, Baselink, Crescent, Eclipse, SmartLink, SureFix, Tracer, and Vector are trademarks of Hemisphere GNSS, Inc.
Rev. 12/17

Power

Input Voltage:	3.3 VDC +/- 5%
Power Consumption:	1.0 W GPS L1 1.6 W GPS L1/L2 GLONASS G1/G2 2.3 W all signals and L-Band
Current Consumption:	303 mA nominal (GPS L1) 484 mA nominal (GPS/GLONASS L1/L2 G1/G2) 696 mA nominal (All Signals + L-Band) 15 VDC maximum
Antenna Voltage:	
Antenna Short Circuit Protection:	Yes
Antenna Gain Input Range:	10 to 40 dB
Antenna Input Impedance:	50 Ω

Environmental

Operating Temperature:	-40°C to +85°C (-40°F to +185°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing (when installed in an enclosure)
Shock and Vibration:	Shock: Mechanical Shock: EP455 Section 5.14.1 Operational (when mounted in an enclosure with screw mounting holes utilized) Vibration: EP455 Section 5.15.1 Random

Mechanical

Dimensions:	P326: 71 L x 41 W x 10.1 H (mm) P327: 72 L x 41 W x 10.1 H (mm)
Weight:	22 g (< 0.78 oz)
Status Indications (LED):	Power, GPS lock, Differential lock, DGPS position
Power/Data Connector:	P326: 34-pin male header, 0.05" (1.27 mm) pitch P327: 20-pin male header, 0.08" (2 mm) pitch
Antenna Connectors:	MCX, female, straight

¹ Depends on multipath environment, number of satellites in view, satellite geometry baseline length (for local services) and ionospheric activity

² Depends on multipath environment, number of satellites in view, satellite geometry and ionospheric activity

³ Hemisphere GNSS proprietary



Hemisphere GNSS, Inc.
8515 E. Anderson Drive
Scottsdale, AZ, USA 85255

Toll-Free: +1 (855) 203-1770
Phone: +1 (480) 348-6380
Fax: +1 (480) 270-5070
Precision@HGNSS.com
www.HGNSS.com